

Understanding and Comparing Unsuccessful Executions in Large Datacenters

Claudio Maggioni

Abstract

The project aims at comparing two different traces coming from large datacenters, focusing in particular on unsuccessful executions of jobs and tasks submitted by users. The objective of this project is to compare the resource waste caused by unsuccessful executions, their impact on application performance, and their root causes. We will show the strong negative impact on CPU and RAM usage and on task slowdown. We will analyze patterns of unsuccessful jobs and tasks, particularly focusing on their interdependency. Moreover, we will uncover their root causes by inspecting key workload and system attributes such as machine locality and concurrency level.

Advisor

Prof. Walter Binder

Assistant

Dr. Andrea Rosá

Advisor's approval (Prof. Walter Binder):

Date:

Contents

Introduction (including Motivation)	2
State of the Art	2
Introduction	2
Rosà et al. 2015 DSN paper	2
Google Borg	2
Traces contents	2
Overview of traces' format	3
Remark on traces size	3
Project requirements and analysis	3
Analysis methodology	4
Overview on challenging aspects of analysis (data size, schema, available computation resources)	4
Introduction on Apache Spark	4
General workflow description of apache spark workflow	4
General Query script design	4
Ad-Hoc presentation of some analysis scripts	4
Analysis and observations	4
Overview of machine configurations in each cluster	6
Analysis of execution time per each execution phase	6
Task slowdown	8
Reserved and actual resource usage of tasks	8
Correlation between task events' metadata and task termination	10
Correlation between task events' resource metadata and task termination	11
Correlation between job events' metadata and job termination	11
Mean number of tasks and event distribution per task type	13
Mean number of tasks and event distribution per job type	13
Probability of task successful termination given its unsuccessful events	13
Potential causes of unsuccessful executions	13
Implementation issues – Analysis limitations	13
Discussion on unknown fields	13
Limitation on computation resources required for the analysis	13
Other limitations	13
Conclusions and future work or possible developments	13

Introduction (including Motivation)

State of the Art

Introduction

TBD

Rosà et al. 2015 DSN paper

TBD

Google Borg

Borg is Google’s own cluster management software. Among the various cluster management services it provides, the main ones are: job queuing, scheduling, allocation, and deallocation due to higher priority computations.

The data this thesis is based on is from 8 Borg “cells” (i.e. clusters) spanning 8 different datacenters, all focused on “compute” (i.e. computational oriented) workloads. The data collection timespan matches the entire month of May 2019.

In Google’s lingo a “job” is a large unit of computational workload made up of several “tasks”, i.e. a number of executions of single executables running on a single machine. A job may run tasks sequentially or in parallel, and the condition for a job’s succesful termination is nontrivial.

Both tasks and jobs lifecycles are represented by several events, which are encoded and stored in the trace as rows of various tables. Among the information events provide, the field “type” provides information on the execution status of the job or task. This field can have the following values:

- **QUEUE**: The job or task was marked not eligible for scheduling by Borg’s scheduler, and thus Borg will move the job/task in a long wait queue;
- **SUBMIT**: The job or task was submitted to Borg for execution;
- **ENABLE**: The job or task became eligible for scheduling;
- **SCHEDULE**: The job or task’s execution started;
- **EVICT**: The job or task was terminated in order to free computational resources for an higher priority job;
- **FAIL**: The job or task terminated its execution unsuccessfully due to a failure;
- **FINISH**: The job or task terminated succesfully;
- **KILL**: The job or task terminated its execution because of a manual request to stop it;
- **LOST**: It is assumed a job or task is has been terminated, but due to missing data there is insufficient information to identify when or how;
- **UPDATE_PENDING**: The metadata (scheduling class, resource requirements, ...) of the job/task was updated while the job was waiting to be scheduled;
- **UPDATE_RUNNING**: The metadata (scheduling class, resource requirements, ...) of the job/task was updated while the job was in execution;

Figure 1 shows the expected transitions between event types.

Traces contents

The traces provided by Google contain mainly a collection of job and task events spanning a month of execution of the 8 different clusters. In addition to this data, some additional data on the machines’ configuration in terms of resources (i.e. amount of CPU and RAM) and additional machine-related metadata.

Due to Google’s policy, most identification related data (like job/task IDs, raw resource amounts and other text values) were obfuscated prior to the release of the traces. One obfuscation that is noteworthy in the scope of this thesis is related to CPU and RAM amounts, which are expressed respetively in NCUs (*Normalized Compute Units*) and NMUs (*Normalized Memory Units*).

NCUs and NMUs are defined based on the raw machine resource distributions of the machines within the 8 clusters. A machine having 1 NCU CPU power and 1 NMU memory size has the maximum amount of raw CPU power and raw RAM size found in the clusters. While RAM size is measured in bytes for normalization purposes, CPU power was measured in GCU (*Google Compute Units*), a proprietary CPU power measurement

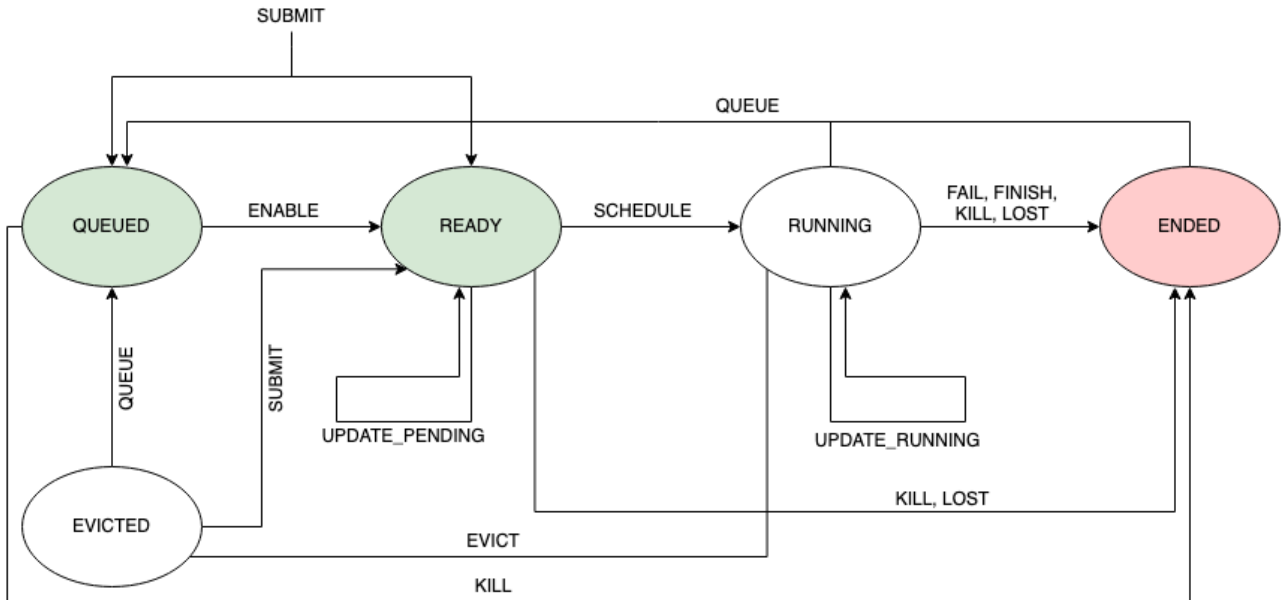


Figure 1. Typical transitions between task/job event types according to Google

unit used by Google that combines several parameters like number of processors and cores, clock frequency, and architecture (i.e. ISA).

Overview of traces' format

The traces have a collective size of approximately 8TiB and are stored in a Gzip-compressed JSONL (JSON lines) format, which means that each table is represented by a single logical “file” (stored in several file segments) where each carriage return separated line represents a single record for that table.

There are namely 5 different table “files”:

- `machine_configs`, which is a table containing each physical machine’s configuration and its evolution over time;
- `instance_events`, which is a table of task events;
- `collection_events`, which is a table of job events;
- `machine_attributes`, which is a table containing (obfuscated) metadata about each physical machine and its evolution over time;
- `instance_usage`, which contains resource (CPU/RAM) measures of jobs and tasks running on the single machines.

The scope of this thesis focuses on the tables `machine_configs`, `instance_events` and `collection_events`.

Remark on traces size

While the 2011 Google Borg traces were relatively small, with a total size in the order of the tens of gigabytes, the 2019 traces are quite challenging to analyze due to their sheer size. As stated before, the traces have a total size of 8 TiB when stored in the format provided by Google. Even when broken down to table “files”, unitary sizes still reach the single terabyte mark (namely for `machine_configs`, the largest table in the trace).

Due to this constraints, a careful data engineering based approach was used when reproducing the 2015 DSN paper analysis. Bleeding edge data science technologies like Apache Spark were used to achieve efficient and parallelized computations. This approach is discussed with further detail in the following section.

Project requirements and analysis

TBD (describe our objective with this analysis in detail)

Analysis methodology

TBD

Overview on challenging aspects of analysis (data size, schema, available computation resources)

TBD

Introduction on Apache Spark

TBD

General workflow description of apache spark workflow

TBD (extract from the notes sent to Filippo shown below)

The Google 2019 Borg cluster traces analysis were conducted by using Apache Spark and its Python 3 API (pyspark). Spark was used to execute a series of queries to perform various sums and aggregations over the entire dataset provided by Google.

In general, each query follows a general Map-Reduce template, where traces are first read, parsed, filtered by performing selections, projections and computing new derived fields. Then, the trace records are often grouped by one of their fields, clustering related data together before a reduce or fold operation is applied to each grouping.

Most input data is in JSONL format and adheres to a schema Google provided in the form of a protobuf specification¹.

One of the main quirks in the traces is that fields that have a “zero” value (i.e. a value like 0 or the empty string) are often omitted in the JSON object records. When reading the traces in Apache Spark it is therefore necessary to check for this possibility and populate those zero fields when omitted.

Most queries use only two or three fields in each trace records, while the original records often are made of a couple of dozen fields. In order to save memory during the query, a projection is often applied to the data by the means of a `.map()` operation over the entire trace set, performed using Spark’s RDD API.

Another operation that is often necessary to perform prior to the Map-Reduce core of each query is a record filtering process, which is often motivated by the presence of incomplete data (i.e. records which contain fields whose values are unknown). This filtering is performed using the `.filter()` operation of Spark’s RDD API.

The core of each query is often a `groupBy` followed by a `map()` operation on the aggregated data. The `groupBy` groups the set of all records into several subsets of records each having something in common. Then, each of these small clusters is reduced with a `.map()` operation to a single record. The motivation behind this computation is often to analyze a time series of several different traces of programs. This is implemented by `groupBy()`-ing records by program id, and then `map()`-ing each program trace set by sorting by time the traces and computing the desired property in the form of a record.

Sometimes intermediate results are saved in Spark’s parquet format in order to compute and save intermediate results beforehand.

General Query script design

TBD

Ad-Hoc presentation of some analysis scripts

TBD (with diagrams)

Analysis and observations

CPU (NCU)	RAM (NMU)	Machine count	% Machines
Unknown	Unknown	8729	1.639218%
1.000000	0.500000	124234	23.329891%
0.591797	0.333496	103013	19.344801%
0.259277	0.166748	78078	14.662260%
0.708984	0.333496	55801	10.478864%
0.386719	0.333496	36237	6.804943%
0.958984	0.500000	31151	5.849843%
0.708984	0.666992	29594	5.557454%
0.386719	0.166748	27011	5.072393%
1.000000	1.000000	12286	2.307187%
0.591797	0.166748	9902	1.859496%
1.000000	0.250000	7550	1.417814%
0.958984	1.000000	3552	0.667030%
0.259277	0.333496	3024	0.567877%
0.591797	0.666992	1000	0.187790%
0.259277	0.083374	634	0.119059%
0.958984	0.250000	600	0.112674%
0.500000	0.062500	54	0.010141%
0.500000	0.250000	34	0.006385%
0.479492	0.250000	12	0.002253%
0.708984	0.250000	6	0.001127%
0.591797	0.250000	4	0.000751%
0.708984	0.500000	2	0.000376%
0.479492	0.500000	2	0.000376%

(a) All clusters

CPU (NCU)	RAM (NMU)	Machine count	% Machines
Unknown	Unknown	1377	1.623170%
0.591797	0.333496	29487	34.758469%
1.000000	0.500000	13440	15.842705%
0.708984	0.333496	12495	14.728764%
0.386719	0.333496	9057	10.676144%
0.386719	0.166748	5265	6.206238%
0.708984	0.666992	4608	5.431784%
1.000000	1.000000	4446	5.240823%
0.591797	0.166748	2484	2.928071%
0.958984	0.500000	1143	1.347337%
0.958984	1.000000	654	0.770917%
1.000000	0.250000	366	0.431431%
0.479492	0.250000	6	0.007073%
0.708984	0.250000	6	0.007073%

(b) A cluster

CPU (NCU)	RAM (NMU)	Machine count	% Machines
Unknown	Unknown	134	0.264812%
0.591797	0.333496	16184	31.982926%
1.000000	0.500000	9790	19.347061%
0.708984	0.333496	8448	16.694992%
0.958984	0.500000	5502	10.873088%
0.708984	0.666992	3832	7.572823%
1.000000	1.000000	2214	4.375321%
0.591797	0.166748	2152	4.252796%
0.386719	0.333496	816	1.612584%
0.958984	1.000000	618	1.221296%
0.591797	0.666992	500	0.988103%
0.386719	0.166748	412	0.814197%

(c) Cluster B

CPU (NCU)	RAM (NMU)	Machine count	% Machines
Unknown	Unknown	1466	2.274208%
0.259277	0.166748	15754	24.439204%
0.386719	0.333496	11104	17.225652%
0.591797	0.333496	10404	16.139741%
0.958984	0.500000	6634	10.291334%
1.000000	0.500000	5654	8.771059%
0.386719	0.166748	3580	5.553660%
0.708984	0.666992	2900	4.498774%
1.000000	1.000000	2736	4.244361%
1.000000	0.250000	2132	3.307375%
0.958984	1.000000	766	1.188297%
0.708984	0.333496	620	0.961807%
0.958984	0.250000	600	0.930781%
0.591797	0.166748	112	0.173746%

(d) Cluster C

CPU (NCU)	RAM (NMU)	Machine count	% Machines
Unknown	Unknown	498	0.794309%
0.591797	0.333496	28394	45.288376%
0.386719	0.333496	8402	13.401174%
0.259277	0.166748	8020	12.791885%
0.386719	0.166748	5806	9.260559%
0.708984	0.666992	4380	6.986092%
0.708984	0.333496	3924	6.258772%
0.591797	0.166748	2548	4.064055%
0.259277	0.333496	426	0.679469%
1.000000	0.500000	292	0.465739%
0.591797	0.250000	4	0.006380%
0.708984	0.500000	2	0.003190%

(e) Cluster D

CPU (NCU)	RAM (NMU)	Machine count	% Machines
Unknown	Unknown	536	0.671915%
0.259277	0.166748	38452	48.202377%
0.708984	0.333496	11786	14.774608%
0.958984	0.500000	8646	10.838389%
0.708984	0.666992	7606	9.534674%
1.000000	0.500000	5586	7.002457%
0.386719	0.166748	4470	5.603470%
0.259277	0.333496	1268	1.589530%
0.259277	0.083374	634	0.794765%
0.591797	0.333496	324	0.406158%
1.000000	0.250000	268	0.335957%
1.000000	1.000000	138	0.172993%
0.500000	0.062500	54	0.067693%
0.500000	0.250000	4	0.005014%

(f) Cluster E

CPU (NCU)	RAM (NMU)	Machine count	% Machines
Unknown	Unknown	1432	2.299958%
1.000000	0.500000	41340	66.396839%
0.708984	0.333496	6878	11.046866%
0.591797	0.333496	5564	8.936430%
0.958984	0.500000	2172	3.488484%
0.386719	0.166748	1544	2.479843%
0.708984	0.666992	1244	1.998008%
1.000000	0.250000	792	1.272044%
0.958984	1.000000	536	0.860878%
0.386719	0.333496	398	0.639234%
1.000000	1.000000	344	0.552504%
0.500000	0.250000	18	0.028910%

(g) Cluster F

CPU (NCU)	RAM (NMU)	Machine count	% Machines
Unknown	Unknown	1566	2.261568%
0.259277	0.166748	15852	22.892958%
1.000000	0.500000	11808	17.052741%
0.708984	0.333496	7968	11.507134%
0.591797	0.333496	7830	11.307839%
0.386719	0.166748	4690	6.773150%
0.708984	0.666992	4258	6.149269%
0.958984	0.500000	4196	6.059731%
0.386719	0.333496	3864	5.580267%
0.591797	0.166748	2606	3.763503%
1.000000	0.250000	2100	3.032754%
0.259277	0.333496	1330	1.920744%
0.958984	1.000000	778	1.123563%
1.000000	1.000000	378	0.545896%
0.500000	0.250000	12	0.017330%
0.479492	0.250000	6	0.008665%
0.479492	0.500000	2	0.002888%

(h) Cluster G

CPU (NCU)	RAM (NMU)	Machine count	% Machines
Unknown	Unknown	1720	2.933251%
1.000000	0.500000	36324	61.946178%
0.591797	0.333496	4826	8.230158%
0.708984	0.333496	3682	6.279205%
0.958984	0.500000	2858	4.873973%
0.386719	0.333496	2596	4.427163%
1.000000	1.000000	2030	3.461919%
1.000000	0.250000	1892	3.226577%
0.386719	0.166748	1244	2.121491%
0.708984	0.666992	766	1.306320%
0.591797	0.666992	500	0.852689%
0.958984	1.000000	200	0.341076%

(i) Cluster H

Figure 2. Overview of machine configurations in terms of CPU and RAM resources for each cluster

Overview of machine configurations in each cluster

Refer to figure 2.


Observations:

- machine configurations are definitely more varied than the ones in the 2011 traces
- some clusters have more machine variability


Analysis of execution time per each execution phase

Color	Execution phase
Blue	Queued
Orange	Ended
Green	Ready
Red	Running
Violet	Evicted
Brown	Unknown


(a) Execution state legend for the graphs

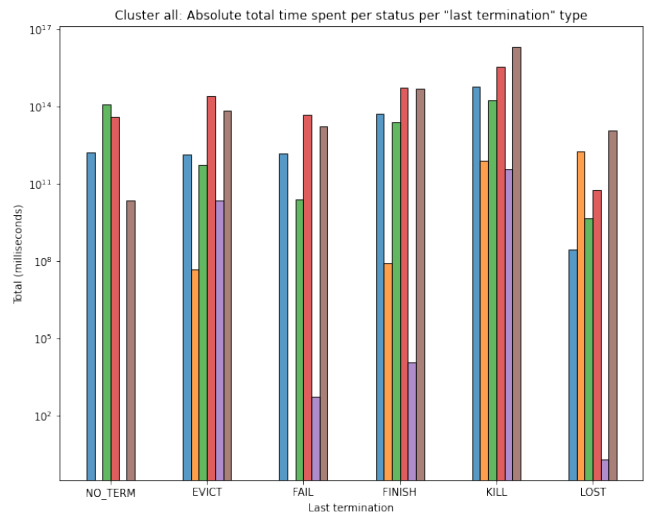


(b) All clusters




(c) Cluster A




(d) Cluster B




(e) Cluster C




(f) Cluster D




(g) Cluster E



(h) Cluster F



(i) Cluster G



(j) Cluster H

Figure 3. Total task time (in milliseconds) spent in each execution phase w.r.t. task termination.

Refer to figures 3 and 4.


Observations:

- Across all cluster almost 50% of time is spent in “unknown” transitions, i.e. there are some time slices that are related to a state transition that Google says are not “typical” transitions. This is mostly due to the trace log being intermittent when recording all state transitions.


¹Google 2019 Borg traces Protobuf specification on Github

Color	Execution phase
Blue	Queued
Orange	Ended
Green	Ready
Red	Running
Violet	Evicted
Brown	Unknown


(a) Execution state legend for the graphs

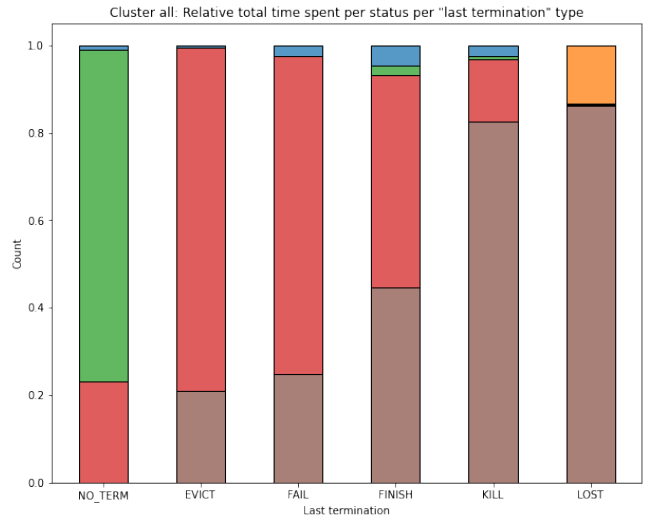


(b) All clusters




(c) Cluster A




(d) Cluster B




(e) Cluster C




(f) Cluster D




(g) Cluster E



(h) Cluster F



(i) Cluster G



(j) Cluster H

Figure 4. Relative task time (in milliseconds) spent in each execution phase w.r.t. task termination.

- 80% of the time spent in KILL and LOST is unknown. This is predictable, since both states indicate that the job execution is not stable (in particular LOST is used when the state logging itself is unstable)
- From the absolute graph we see that the time “wasted” on non-finish terminated jobs is very significant
- Execution is the most significant task phase, followed by queuing time and scheduling time (“ready” state)
- In the absolute graph we see that a significant amount of time is spent to re-schedule evicted jobs (“evicted” state)
- Cluster A has unusually high queuing times

Task slowdown

Priority	% finished tasks	Mean slowdown
Unknown	10.620113%	1.097556
24	0.000000%	-
25	0.333054%	82.973285
100	0.000000%	-
101	81.917703%	30.798089
102	0.000000%	-
103	14.990678%	1.130579
105	57.678214%	1.078733
107	53.926543%	1.016187
114	0.000000%	-
115	4.108501%	1.004324
116	13.045304%	1.032749
117	0.000000%	-
118	11.907081%	1.003494
119	21.264583%	1.504923
170	0.000000%	-
200	27.211754%	4.116760
205	0.000000%	-
210	0.000000%	-
214	0.000000%	-
215	0.000000%	-
360	0.616372%	2.924018
400	0.000000%	-
450	2.203423%	1.142450
500	0.000000%	-

(a) Cluster A

Priority	% finished tasks	Mean slowdown
0	45.193049%	1.176397
25	0.018094%	133.481864
80	0.000000%	-
100	0.000000%	-
101	66.479321%	433.414195
103	0.106377%	1.645114
105	0.463292%	2.408090
107	0.000000%	-
114	0.676897%	1.003422
115	4.117647%	5.916852
116	8.316438%	1.109652
117	0.000000%	-
118	0.311290%	1.000000
119	0.195997%	2.555160
170	0.000000%	-
199	0.000000%	-
200	30.916717%	9.707524
205	0.000000%	-
210	0.000000%	-
214	0.000000%	-
215	0.000000%	-
360	3.502999%	1.612147
450	0.612913%	1.057515

(b) Cluster B

Priority	% finished tasks	Mean slowdown
0	50.887820%	1.105787
3	0.000000%	-
10	0.000000%	-
25	22.468276%	8.191258
100	0.000000%	-
101	52.628263%	421.490544
103	0.005336%	2.794339
105	0.023521%	1.372291
107	0.000245%	14.708268
114	0.022221%	1.011266
115	0.281832%	1.980743
116	0.013836%	1.022119
117	93.165468%	1.000000
118	0.004137%	1.100009
119	2.215917%	2.044049
170	0.000000%	-
200	3.606796%	4.139724
205	0.000000%	-
210	0.000000%	-
214	0.000000%	-
215	0.000000%	-
360	4.367418%	2.061085
450	1.512578%	1.066014

(c) Cluster C

Priority	% finished tasks	Mean slowdown
0	26.522899%	1.116002
5	0.000000%	-
25	16.293068%	65.676400
100	0.000000%	-
101	45.314870%	315.954065
103	0.004540%	1.065721
105	0.051712%	2.897040
107	0.000350%	1.551354
114	0.000000%	-
115	5.189033%	2.186562
116	0.126154%	1.278510
117	85.714286%	1.000000
118	0.054055%	2.048749
119	0.441844%	3.020486
197	0.000000%	-
199	0.000000%	-
200	6.528759%	5.514350
205	0.000000%	-
210	0.000000%	-
214	0.000000%	-
215	0.000000%	-
360	1.594977%	2.476706
450	0.611145%	1.330248

(d) Cluster D

Priority	% finished tasks	Mean slowdown
0	42.805214%	1.439544
25	5.344531%	2.676136
100	0.000000%	-
101	0.015918%	1.122507
103	0.021660%	3.163046
105	0.404803%	14.750313
107	0.000000%	-
114	0.000000%	-
115	0.027326%	1.000000
116	0.000000%	-
117	0.000000%	-
118	0.000000%	-
119	0.458256%	10.310893
170	0.000000%	-
200	1.959258%	8.535722
201	0.000000%	-
205	0.000000%	-
210	0.000000%	-
215	0.000000%	-
220	0.000000%	-
360	37.157031%	2.873243
450	0.548458%	1.113283

(e) Cluster E

Priority	% finished tasks	Mean slowdown
0	45.208221%	1.088162
25	0.647505%	2.230960
100	0.000000%	-
101	40.296631%	323.858714
103	0.058418%	1.167347
105	0.222372%	1.550453
107	0.060860%	1.012727
114	0.006958%	1.000000
115	3.647104%	5.94215
116	0.000000%	-
117	0.000086%	1.000000
118	0.002082%	1.000000
119	31.354662%	7.608799
200	3.653528%	5.943247
201	0.000000%	-
360	7.424790%	2.171524
450	0.992623%	1.021053

(f) Cluster F

Priority	% finished tasks	Mean slowdown
0	33.612201%	1.138988
25	0.233338%	8.692558
50	0.000000%	-
100	0.000000%	-
101	96.470338%	19.378523
103	0.032539%	1.271282
105	0.196286%	1.000738
107	0.000000%	-
114	0.000000%	-
115	7.633588%	1.802068
117	0.000000%	-
118	48.969072%	3.877102
119	0.085944%	3.166077
170	0.000000%	-
200	26.747126%	14.573912
360	1.618878%	2.119524
450	2.737219%	1.036927

(g) Cluster G

Priority	% finished tasks	Mean slowdown
0	27.744380%	1.122458
19	0.000000%	-
25	1.042767%	3.064188
101	100.000000%	76.438090
103	0.481256%	1.262067
105	1.427256%	4.205547
107	0.000000%	-
115	5.122494%	1.000000
116	1.035309%	73.447995
117	0.000050%	1.000000
118	1.003331%	1.947121
119	0.145214%	7.301093
200	2.702770%	5.798142
201	0.000000%	-
220	0.000000%	-
360	4.425746%	2.018441
450	0.535389%	1.054678

(h) Cluster H

Figure 5. Mean task slowdown for each cluster and each task priority


Refer to figure 5

Observations:

- Priority values are different from 0-11 values in the 2011 traces. A conversion table is provided by Google;
- For some priorities (e.g. 101 for cluster D) the relative number of finishing task is very low and the mean slowdown is very high (315). This behaviour differs from the relatively homogeneous values from the 2011 traces.
- Some slowdown values cannot be computed since either some tasks have a 0ns execution time or for some priorities no tasks in the traces terminate successfully. More raw data on those exception is in Jupyter.
- The % of finishing jobs is relatively low comparing with the 2011 traces.

Reserved and actual resource usage of tasks


Refer to figures 6 and 7.

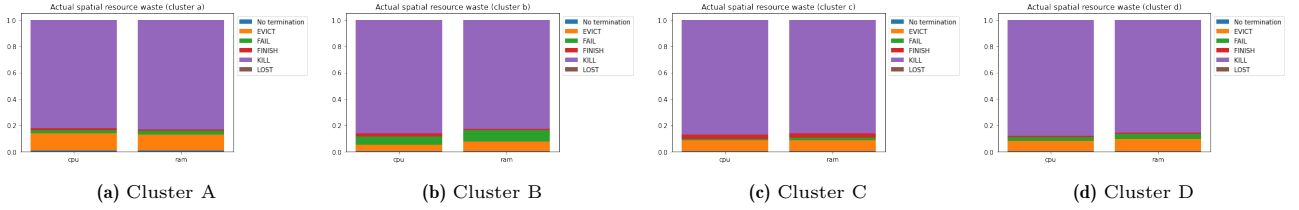

Task termination	% CPU	% RAM	Task termination	% CPU	% RAM	Task termination	% CPU	% RAM	Task termination	% CPU	% RAM
No termination	0.6972%	1.0447%	No termination	0.2582%	0.4637%	No termination	0.3376%	0.3812%	No termination	0.4995%	0.4822%
Evict	13.4392%	11.8184%	Evict	4.8340%	7.3120%	Evict	8.2099%	8.0454%	Evict	7.6002%	9.0656%
Fail	2.2792%	2.8387%	Fail	6.2950%	8.3841%	Fail	1.2294%	2.0809%	Fail	3.0288%	3.9214%
Finish	1.3963%	1.1066%	Finish	2.5877%	1.2231%	Finish	2.9399%	3.3249%	Finish	0.8666%	0.8914%
Kill	82.1791%	83.1826%	Kill	86.0215%	82.6144%	Kill	87.2740%	86.1588%	Kill	88.0011%	85.6364%
Lost	0.0091%	0.0091%	Lost	0.0036%	0.0027%	Lost	0.0093%	0.0088%	Lost	0.0039%	0.0030%


(e) Cluster A (exact values) (f) Cluster B (exact values) (g) Cluster C (exact values) (h) Cluster D (exact values)

Figure 6. Relative usage of CPU and RAM resources w.r.t. final task termination.

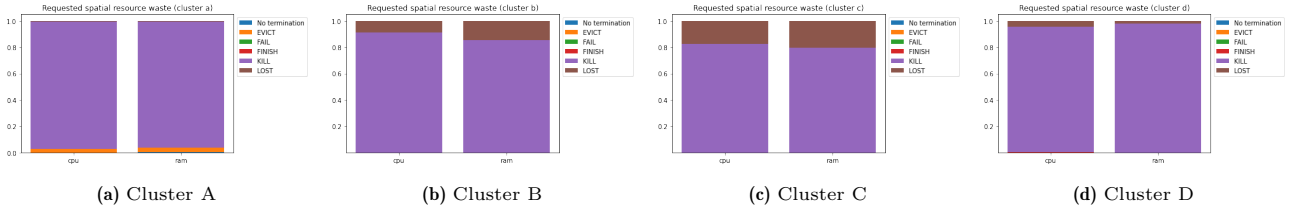

Task termination	% CPU	% RAM	Task termination	% CPU	% RAM	Task termination	% CPU	% RAM	Task termination	% CPU	% RAM
No termination	0.033962%	0.193674%	No termination	0.000094%	0.000191%	No termination	0.000105%	0.000221%	No termination	0.000948%	0.000128%
Evict	2.838362%	3.399075%	Evict	0.003365%	0.004696%	Evict	0.008618%	0.006991%	Evict	0.046057%	0.006352%
Fail	0.058335%	0.069755%	Fail	0.003061%	0.004965%	Fail	0.001261%	0.001459%	Fail	0.023703%	0.002770%
Finish	0.000102%	0.000151%	Finish	0.012696%	0.017647%	Finish	0.015047%	0.017003%	Finish	0.095353%	0.012975%
Kill	96.661332%	95.799104%	Kill	91.094839%	85.573746%	Kill	82.483146%	79.698011%	Kill	95.468127%	97.927565%
Lost	0.407908%	0.538242%	Lost	8.885947%	14.398756%	Lost	17.491823%	20.276314%	Lost	4.365813%	2.050210%

(e) Cluster A (exact values) (f) Cluster B (exact values) (g) Cluster C (exact values) (h) Cluster D (exact values)

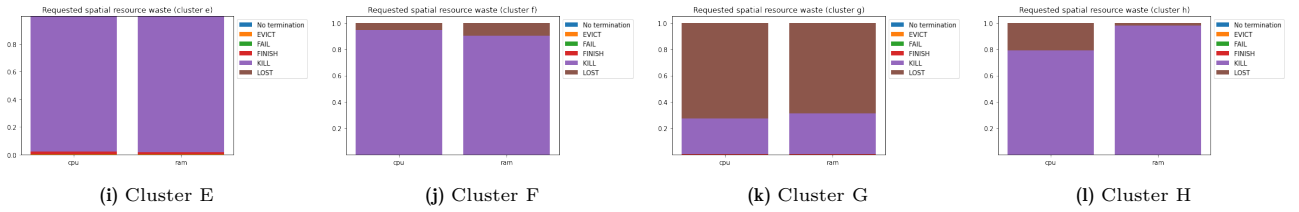

Task termination	% CPU	% RAM	Task termination	% CPU	% RAM	Task termination	% CPU	% RAM	Task termination	% CPU	% RAM
No termination	0.015102%	0.016472%	No termination	0.000114%	0.000306%	No termination	0.001283%	0.000748%	No termination	0.000148%	0.000022%
Evict	0.362088%	0.321274%	Evict	0.007986%	0.013466%	Evict	0.034040%	0.025278%	Evict	0.006021%	0.000751%
Fail	0.051373%	0.047377%	Fail	0.000913%	0.002064%	Fail	0.004384%	0.003918%	Fail	0.000858%	0.000144%
Finish	1.672195%	1.310360%	Finish	0.013296%	0.021751%	Finish	0.176091%	0.166656%	Finish	0.015642%	0.001873%
Kill	97.899179%	98.304482%	Kill	94.396548%	90.227868%	Kill	27.376816%	30.954255%	Kill	78.910066%	97.713322%
Lost	0.000063%	0.000034%	Lost	5.581144%	9.734546%	Lost	72.407386%	68.849146%	Lost	21.067264%	2.283888%

(m) Cluster E (exact values) (n) Cluster F (exact values) (o) Cluster G (exact values) (p) Cluster H (exact values)

Figure 7. Relative request of CPU and RAM resources prior to tasks' execution w.r.t. final task termination.

Observations:

- Most (measured and requested) resources are used by killed job, even more than in the 2011 traces.
- Behaviour is rather homogeneous across datacenters, with the exception of cluster G where a lot of LOST-terminated tasks acquired 70% of both CPU and RAM

Correlation between task events' metadata and task termination

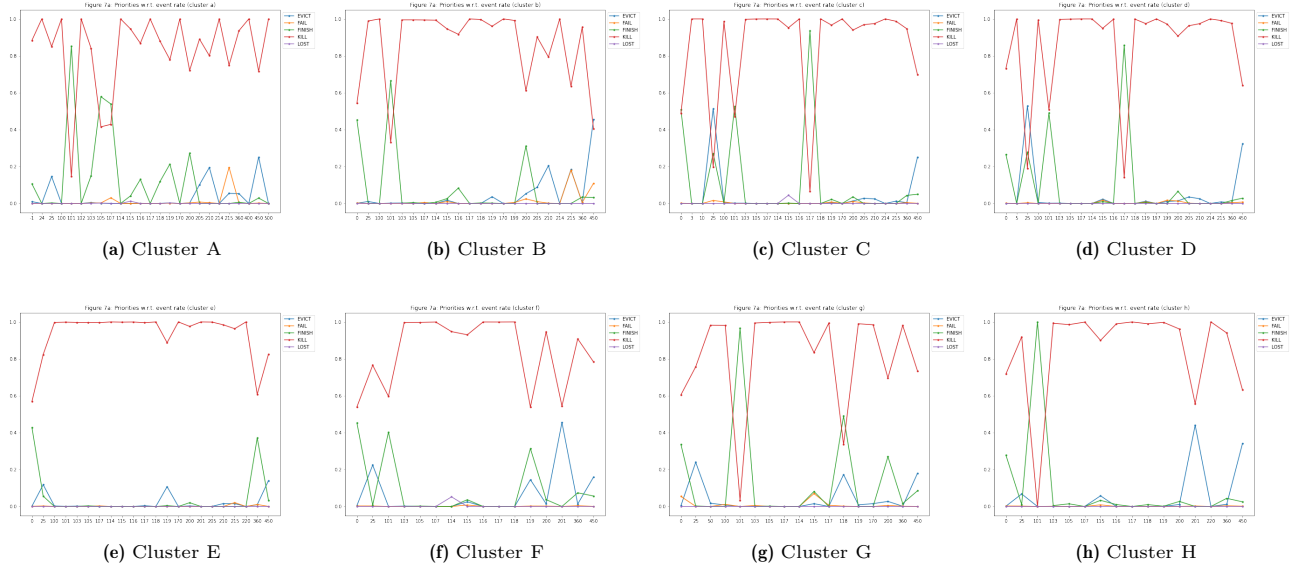


Figure 8. Task event rates vs. task priority and final task termination

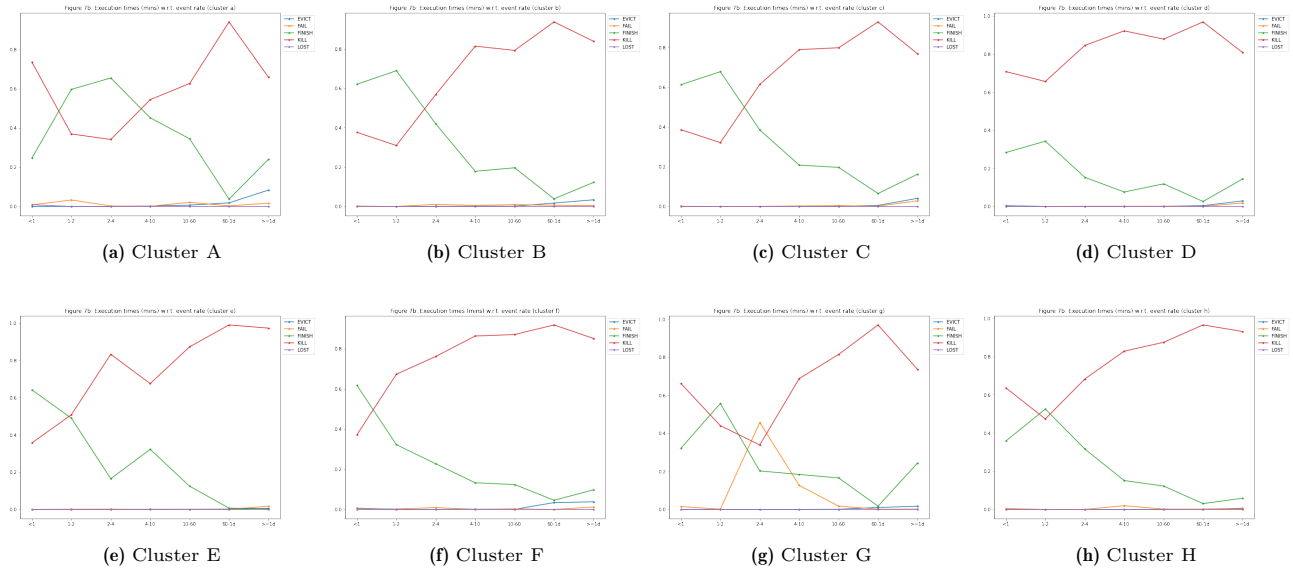


Figure 9. Task event rates vs. event execution time and final task termination

Refer to figures 8, 9, and 10.

Observations:

- No smooth curves in this figure either, unlike 2011 traces
- The behaviour of curves for 7a (priority) is almost the opposite of 2011, i.e. in-between priorities have higher kill rates while priorities at the extremum have lower kill rates. This could also be due to the inherent distribution of job terminations;
- Event execution time curves are quite different than 2011, here it seems there is a good correlation between short task execution times and finish event rates, instead of the U shape curve in 2015 DSN

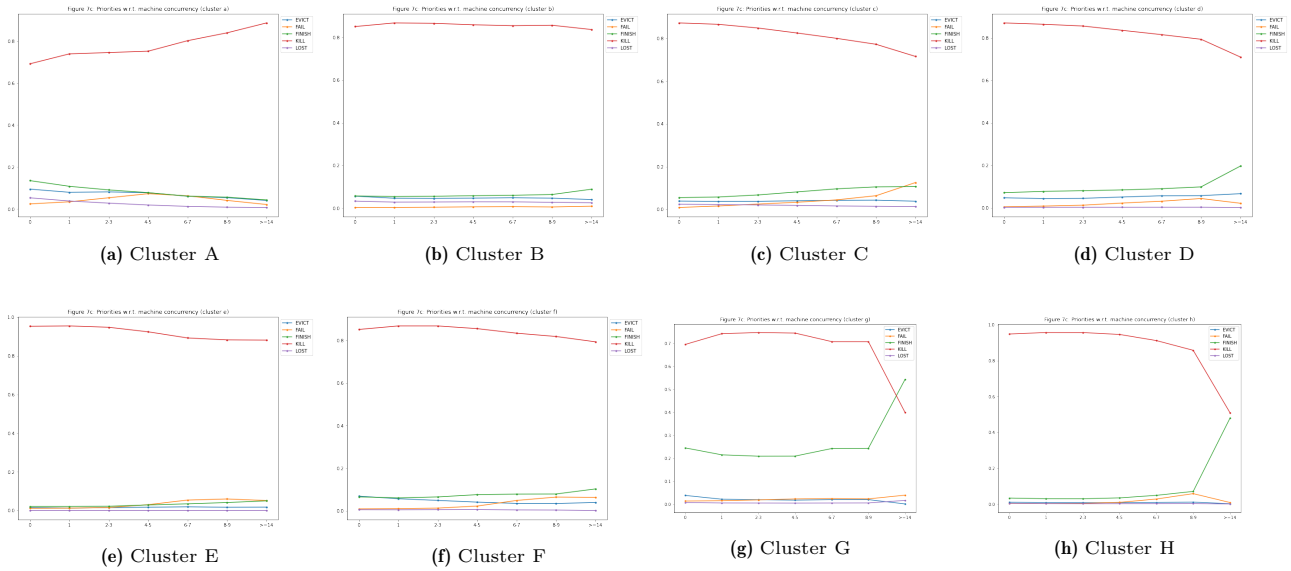


Figure 10. Task event rates vs. machine concurrency and final task termination

- In figure 9 cluster behaviour seems quite uniform
- Machine concurrency seems to play little role in the event termination distribution, as for all concurrency factors the kill rate is at 90%.

Correlation between task events' resource metadata and task termination

Correlation between job events' metadata and job termination

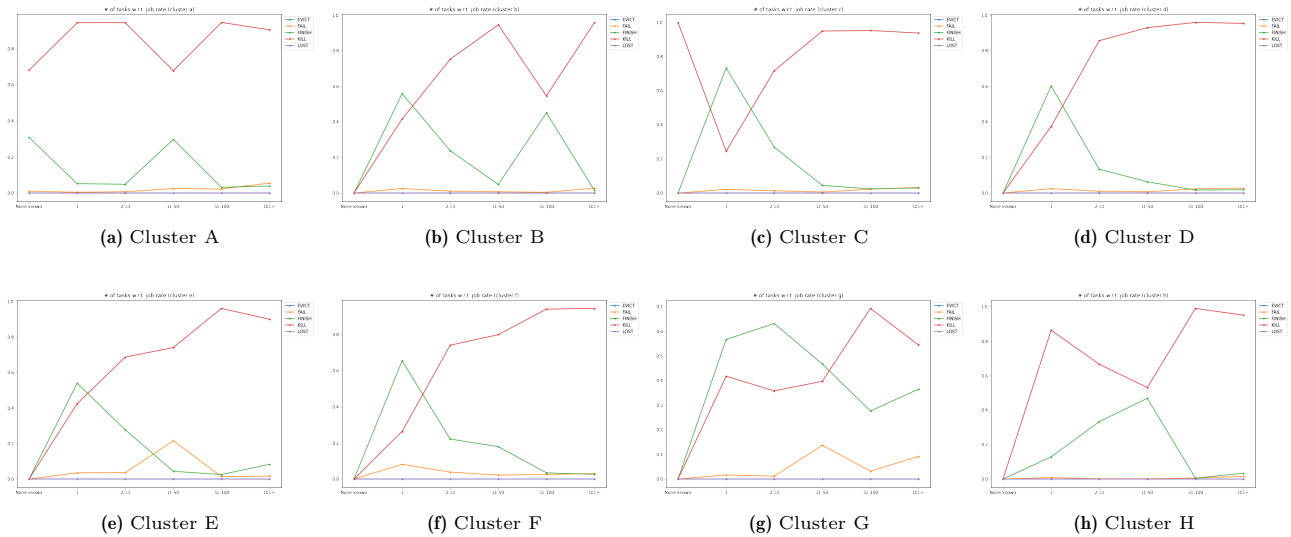


Figure 11. Job event rates vs. job size and final job termination

Refer to figures 11, 12, and 13.

Observations:

- Behaviour between cluster varies a lot
- There are no “smooth” gradients in the various curves unlike in the 2011 traces
- Killed jobs have higher event rates in general, and overall dominate all event rates measures
- There still seems to be a correlation between short execution job times and successful final termination, and likewise for kills and higher job terminations
- Across all clusters, a machine locality factor of 1 seems to lead to the highest success event rate

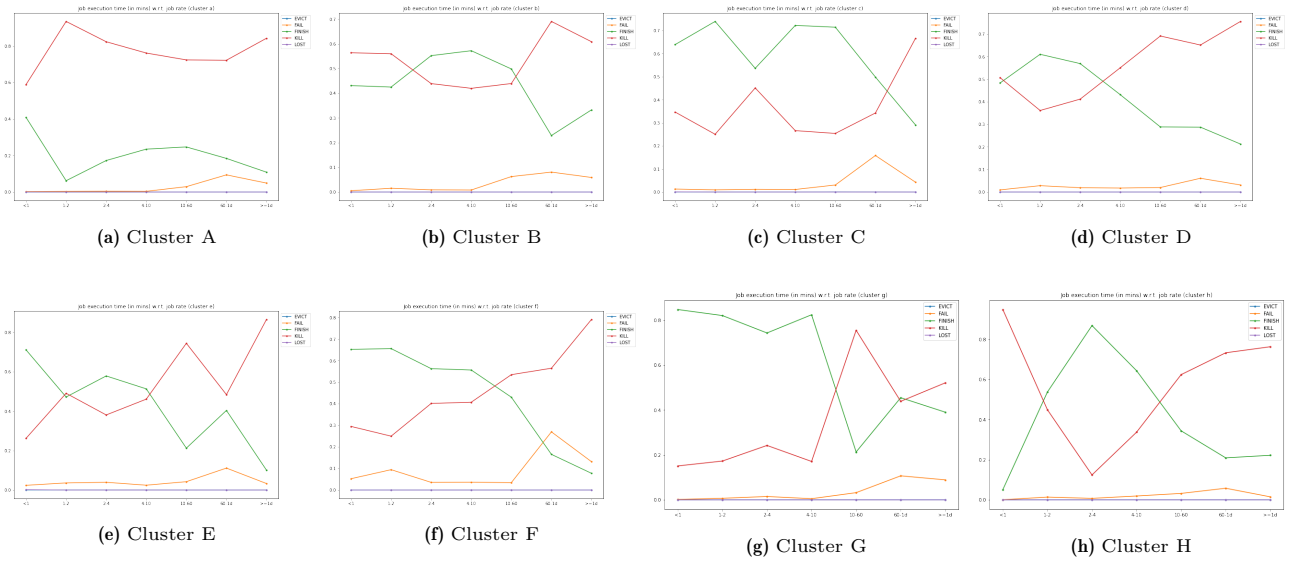


Figure 12. Job event rates vs. event execution time and final job termination

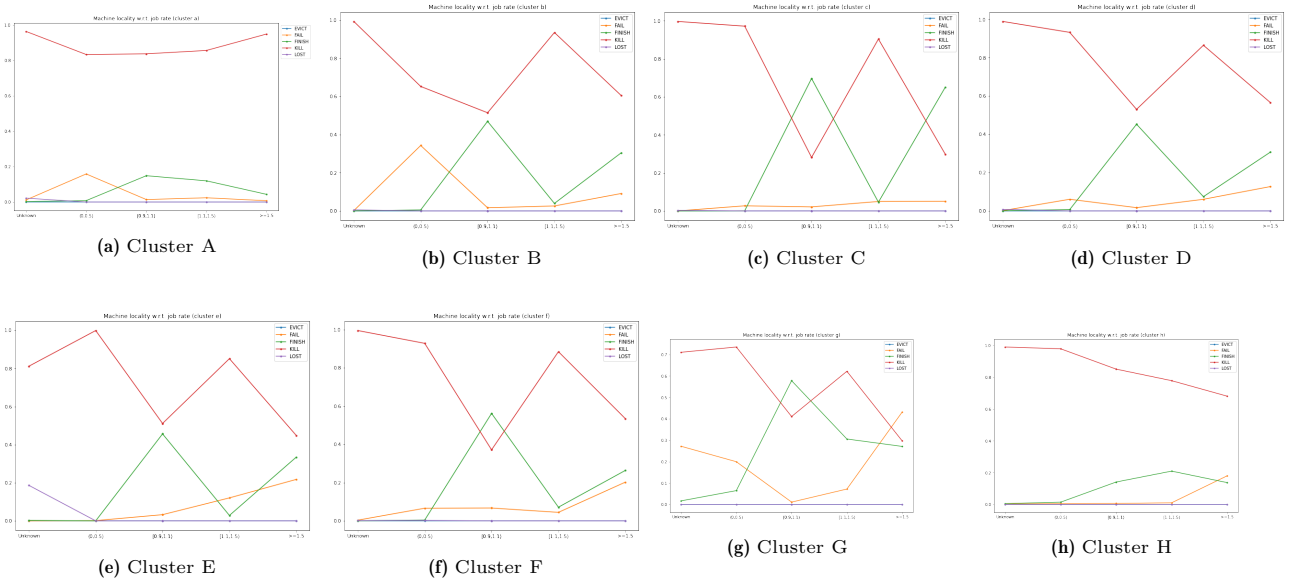


Figure 13. Job event rates vs. machine locality and final job termination

Mean number of tasks and event distribution per task type

Refer to figure 14.

Observations:

- The mean number of events per task is an order of magnitude higher than in the 2011 traces
- Generally speaking, the event type with higher mean is the termination event for the task
- The # evts mean is higher than the sum of all other event type means, since it appears there are a lot more non-termination events in the 2019 traces.

Mean number of tasks and event distribution per job type

Refer to figure 15.

Observations:

- Again the mean number of tasks is significantly higher than the 2011 traces, indicating a higher complexity of workloads
- Cluster A has no evicted jobs
- The number of events is however lower than the event means in the 2011 traces

Probability of task successful termination given its unsuccessful events

Refer to figure 16.

Observations:

- Behaviour is very different from cluster to cluster
- There is no easy conclusion, unlike in 2011, on the correlation between succesful probability and # of events of a specific type.
- Clusters B, C and D in particular have very unsmooth lines that vary a lot for small # evts differences. This may be due to an uneven distribution of # evts in the traces.

Potential causes of unsuccessful executions

TBD

Implementation issues – Analysis limitations

Discussion on unknown fields

TBD

Limitation on computation resources required for the analysis

TBD

Other limitations . . .

TBD

Conclusions and future work or possible developments

TBD

Task termination	# Evts.	95% p.tile	# Evts. mean	# EVICT Evts. mean	# FAIL Evts. mean	# FINISH Evts. mean	# KILL Evts. mean	# LOST Evts. mean
KILL	58.0		27.395925	2.349579	0.213859	0.003412	3.395996	0.089576
FINISH	9.0		12.405370	0.019321	0.003779	2.153432	0.008150	0.008989
FAIL	108.0		50.039556	0.287778	11.061864	0.002098	0.467656	0.053144
LOST	7.0		8.847145	0.083348	0.001821	0.384190	1.329910	1.007933
EVICT	2924.0		428.550689	73.693595	0.768553	0.000179	28.766164	0.845501
No termination	84.0		14.818523	0.000000	0.000000	0.000000	0.000000	0.000000

(a) Cluster A

Task termination	# Evts.	95% p.tile	# Evts. mean	# EVICT Evts. mean	# FAIL Evts. mean	# FINISH Evts. mean	# KILL Evts. mean	# LOST Evts. mean
KILL	60.0		40.901041	3.351496	0.276305	0.003656	5.541079	0.033457
FINISH	20.0		17.277596	0.020444	0.020628	2.942579	0.011640	0.016278
FAIL	260.0		86.772419	0.518061	19.656798	0.000560	0.675392	0.088523
LOST	14.0		25.690455	0.257231	0.007420	1.928351	3.515436	2.015153
EVICT	1578.0		345.705559	64.816518	0.240214	0.000000	17.961539	1.028401
No termination	32.0		13.018130	0.000000	0.000000	0.000000	0.000000	0.000000

(b) Cluster B

Task termination	# Evts.	95% p.tile	# Evts. mean	# EVICT Evts. mean	# FAIL Evts. mean	# FINISH Evts. mean	# KILL Evts. mean	# LOST Evts. mean
KILL	32.0		24.230887	1.533237	0.116082	0.003994	3.799111	0.013670
FINISH	18.0		15.242628	0.017929	0.012701	2.470654	0.006020	0.006414
FAIL	156.0		187.030894	0.772823	48.445773	2.035378	0.756015	0.133687
LOST	28.0		22.385446	0.411365	0.007569	1.412201	2.751353	1.998665
EVICT	1748.0		404.108669	73.715527	1.812816	0.000166	22.908022	0.546198
No termination	96.0		21.315166	0.000000	0.000000	0.000000	0.000000	0.000000

(c) Cluster C

Task termination	# Evts.	95% p.tile	# Evts. mean	# EVICT Evts. mean	# FAIL Evts. mean	# FINISH Evts. mean	# KILL Evts. mean	# LOST Evts. mean
KILL	32.0		29.953873	1.960134	0.150521	0.002385	4.682411	0.016156
FINISH	18.0		23.105615	0.058651	0.019051	3.789050	0.009785	0.018699
FAIL	269.0		228.004975	0.496316	58.968210	0.809520	2.040396	0.324754
LOST	20.0		17.065721	0.014760	0.003577	0.079289	4.636283	1.999794
EVICT	1478.0		323.366130	62.000510	0.700268	0.000373	14.057514	0.627592
No termination	103.0		27.867403	0.000000	0.000000	0.000000	0.000000	0.000000

(d) Cluster D

Task termination	# Evts.	95% p.tile	# Evts. mean	# EVICT Evts. mean	# FAIL Evts. mean	# FINISH Evts. mean	# KILL Evts. mean	# LOST Evts. mean
KILL	258.0		55.877475	1.287917	0.056909	0.000185	12.159880	0.054997
FINISH	14.0		11.976806	0.013879	0.008435	1.998677	0.008241	0.026641
FAIL	138.0		450.526937	0.457703	111.471047	0.000000	0.455705	0.187991
LOST	14.0		11.899908	0.000000	0.000000	0.033976	3.131007	1.792164
EVICT	310.0		84.645189	11.780754	0.106119	0.000090	5.790960	0.654955
No termination	34.0		7.349165	0.000000	0.000000	0.000000	0.000000	0.000000

(e) Cluster E

Task termination	# Evts.	95% p.tile	# Evts. mean	# EVICT Evts. mean	# FAIL Evts. mean	# FINISH Evts. mean	# KILL Evts. mean	# LOST Evts. mean
KILL	162.0		45.039557	0.384065	0.098430	0.001178	9.804287	0.037783
FINISH	20.0		19.899709	0.019381	0.003510	3.007839	0.097934	0.023707
FAIL	220.0		164.043073	0.279352	39.257407	0.000023	1.549795	0.203997
LOST	36.0		25.002219	0.011815	0.000909	0.149586	7.283534	2.000428
EVICT	510.0		302.262347	23.973621	0.192394	0.000094	45.979997	0.374789
No termination	24.0		7.784905	0.000000	0.000000	0.000000	0.000000	0.000000

(f) Cluster F

Task termination	# Evts.	95% p.tile	# Evts. mean	# EVICT Evts. mean	# FAIL Evts. mean	# FINISH Evts. mean	# KILL Evts. mean	# LOST Evts. mean
KILL	641.00		130.054143	6.909204	0.135073	0.000033	25.275769	0.131106
FINISH	18.00		105.240418	0.015228	0.001655	14.153775	0.004879	0.158300
FAIL	40.00		40.121553	0.016111	8.592728	0.000000	0.338883	0.011310
LOST	4602.25		576.384120	1.931330	0.360515	48.094421	35.595667	3.543335
EVICT	2015.00		555.574743	77.429054	0.303127	0.000000	58.299330	0.653819
No termination	30.00		9.503553	0.000000	0.000000	0.000000	0.000000	0.000000

(g) Cluster G

Task termination	# Evts.	95% p.tile	# Evts. mean	# EVICT Evts. mean	# FAIL Evts. mean	# FINISH Evts. mean	# KILL Evts. mean	# LOST Evts. mean
KILL	388.0		74.425542	0.633338	0.169666	0.000231	17.172624	0.062799
FINISH	22.0		23.978294	0.023700	0.014129	3.632529	0.011111	0.028482
FAIL	487.0		170.153701	0.600483	37.599942	0.000000	2.866647	0.343806
LOST	386.4		94.666667	1.493333	2.400000	0.573333	14.040000	3.480000
EVICT	206.0		75.658064	6.732544	0.837154	0.000000	7.164722	0.421745
No termination	18.0		8.123506	0.000000	0.000000	0.000000	0.000000	0.000000

(h) Cluster H

Figure 14. Mean number of tasks and event distribution per task type

Job termination	# Tasks mean	# Tasks 95% p.tile	# EVICT Evt. mean	# FAIL Evt. mean	# FINISH Evt. mean	# KILL Evt. mean	# LOST Evt. mean
No termination	92.359436	174.3	23.263951	3.454474	23.047597	34.565608	0.707709
EVICT	-1.000000	-1.0	NaN	NaN	NaN	NaN	NaN
FAIL	90.792728	499.0	0.694942	0.683556	0.085957	1.849587	0.009730
FINISH	1.187092	1.0	0.004696	0.001341	1.072623	0.024396	0.000952
KILL	16.533171	10.0	1.045419	0.073867	0.461387	1.188720	0.044610
LOST	223.206593	1689.6	0.000000	0.000000	0.000000	1.034082	0.974598

(a) Cluster A

Job termination	# Tasks mean	# Tasks 95% p.tile	# EVICT Evt. mean	# FAIL Evt. mean	# FINISH Evt. mean	# KILL Evt. mean	# LOST Evt. mean
No termination	112.422759	169.8	34.681161	0.711242	13.379533	38.794188	0.780483
EVICT	1.000000	1.0	1.000000	0.000000	0.000000	0.000000	0.000000
FAIL	74.367804	374.0	2.003355	1.993765	0.266584	4.944145	0.034526
FINISH	6.304299	10.0	0.022380	0.008476	2.349304	0.012729	0.006484
KILL	69.853370	234.0	1.696449	0.157833	0.613748	3.008678	0.012092
LOST	320.020202	459.8	0.000000	0.000000	0.000000	2.959946	1.996875

(b) Cluster B

Job termination	# Tasks mean	# Tasks 95% p.tile	# EVICT Evt. mean	# FAIL Evt. mean	# FINISH Evt. mean	# KILL Evt. mean	# LOST Evt. mean
No termination	96.399561	100.0	55.276973	7.52906	23.848867	41.578669	0.664107
EVICT	1.000000	1.0	1.000829	0.000000	0.000000	0.000415	0.000000
FAIL	41.982301	200.0	3.483606	0.997592	0.376438	3.998369	0.046439
FINISH	1.991485	1.0	0.021806	0.016914	1.565034	0.017401	0.001803
KILL	110.680808	652.0	0.627334	0.059076	0.656426	2.266794	0.006258
LOST	38.870091	48.6	0.000031	0.000311	0.000000	2.620721	1.833872

(c) Cluster C

Job termination	# Tasks mean	# Tasks 95% p.tile	# EVICT Evt. mean	# FAIL Evt. mean	# FINISH Evt. mean	# KILL Evt. mean	# LOST Evt. mean
No termination	103.889887	120.00	41.421532	7.604808	18.179476	47.603502	0.661826
EVICT	1.000000	1.00	1.000000	0.000000	0.000000	0.000000	0.000000
FAIL	43.356882	250.00	6.111993	0.948602	0.531390	6.497784	0.041077
FINISH	2.109260	2.00	0.268375	0.012614	1.723392	0.018567	0.005052
KILL	89.647948	283.00	1.013114	0.054374	0.283313	3.255675	0.006664
LOST	271.441748	2620.75	0.000000	0.000000	0.000000	5.938069	1.647084

(d) Cluster D

Job termination	# Tasks mean	# Tasks 95% p.tile	# EVICT Evt. mean	# FAIL Evt. mean	# FINISH Evt. mean	# KILL Evt. mean	# LOST Evt. mean
No termination	350.929407	596.0	7.204391	2.074423	0.126290	46.646065	0.378274
EVICT	1.000000	1.0	1.000000	0.000000	0.000000	0.000000	0.000000
FAIL	23.081125	25.0	0.246529	0.665546	0.716720	1.588119	0.066467
FINISH	7.776085	2.0	0.018677	0.029073	1.934488	0.020929	0.064920
KILL	88.790215	309.0	0.706293	0.028618	0.461084	7.572301	0.029122
LOST	5.374150	5.0	0.000000	0.000000	0.000000	3.234494	1.813924

(e) Cluster E

Job termination	# Tasks mean	# Tasks 95% p.tile	# EVICT Evt. mean	# FAIL Evt. mean	# FINISH Evt. mean	# KILL Evt. mean	# LOST Evt. mean
No termination	217.718640	379.4	4.304676	1.315021	4.971122	48.118465	0.464429
EVICT	1.000000	1.0	1.000000	0.000000	0.000000	0.000000	0.000000
FAIL	17.161251	8.0	0.621327	0.546356	0.426265	7.559244	0.034773
FINISH	2.940843	2.0	0.014704	0.051014	1.669860	0.162042	0.002623
KILL	103.888843	361.0	0.182630	0.063914	0.416684	5.824311	0.014161
LOST	3736.500000	18823.4	0.001491	0.000038	0.000000	6.298140	1.429604

(f) Cluster F


Job termination	# Tasks mean	# Tasks 95% p.tile	# EVICT Evt. mean	# FAIL Evt. mean	# FINISH Evt. mean	# KILL Evt. mean	# LOST Evt. mean
No termination	342.090034	599.10	14.184405	0.626186	23.836017	46.002917	0.735801
EVICT	1.000000	1.00	1.000000	0.000000	0.000000	0.000000	0.000000
FAIL	51.834803	250.00	0.555532	3.334848	0.607560	20.351992	0.176242
FINISH	8.519166	36.00	0.001733	0.629809	1.759677	0.005452	0.004575
KILL	37.054914	100.00	5.687172	0.064640	0.080370	19.166260	0.059132
LOST	190.500000	358.35	0.000000	0.000000	0.000000	1.994751	1.994751

(g) Cluster G


Job termination	# Tasks mean	# Tasks 95% p.tile	# EVICT Evt. mean	# FAIL Evt. mean	# FINISH Evt. mean	# KILL Evt. mean	# LOST Evt. mean
No termination	321.133053	546.9	3.470078	0.907801	3.316902	44.535824	0.315120
EVICT	1.000000	1.0	1.000000	0.000000	0.000000	0.000000	0.000000
FAIL	20.504293	1.0	0.114090	2.300036	0.980635	12.833466	0.046833
FINISH	4.278193	14.0	0.005406	0.152814	1.778038	0.013567	0.012663
KILL	11.022705	3.0	0.235500	0.102899	0.287701	11.336956	0.031148
LOST	3.400000	10.6	0.000000	0.000000	0.000000	0.235294	1.705882

(h) Cluster H


Figure 15. Mean number of tasks and event distribution per job type

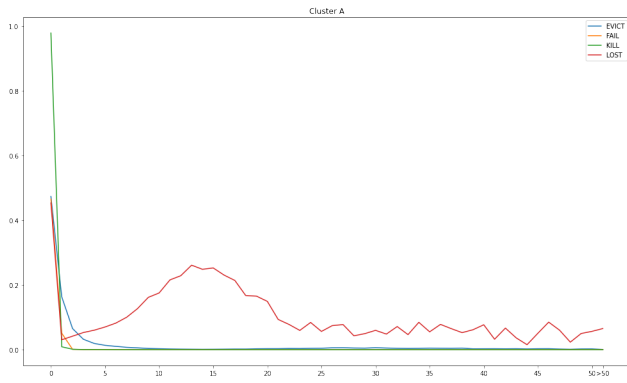


(a) Cluster A

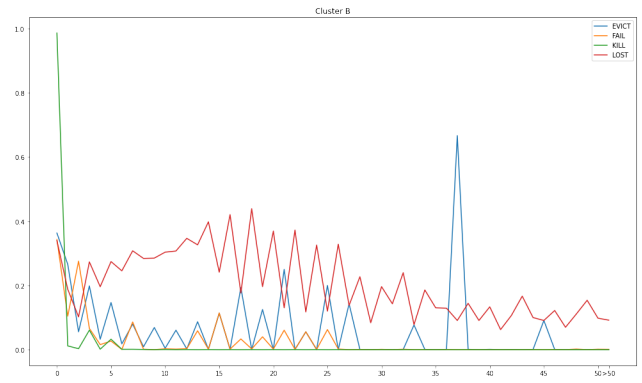


(b) Cluster B

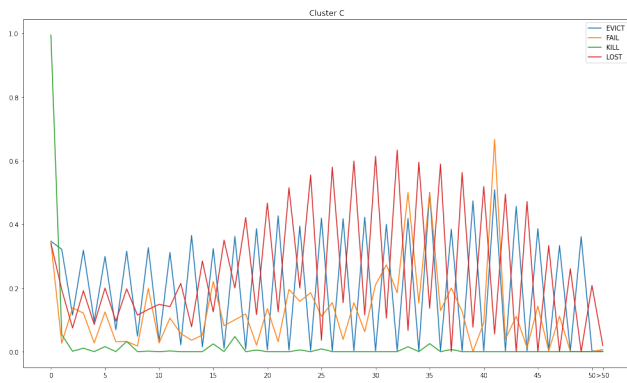


(c) Cluster C

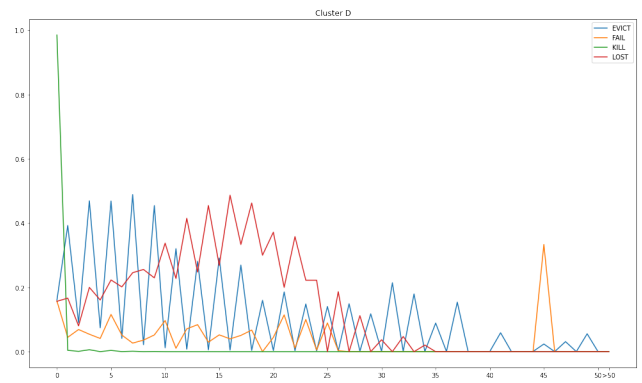


(d) Cluster D

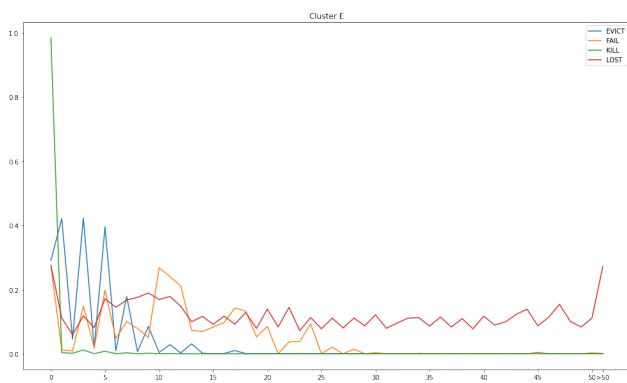


(e) Cluster E

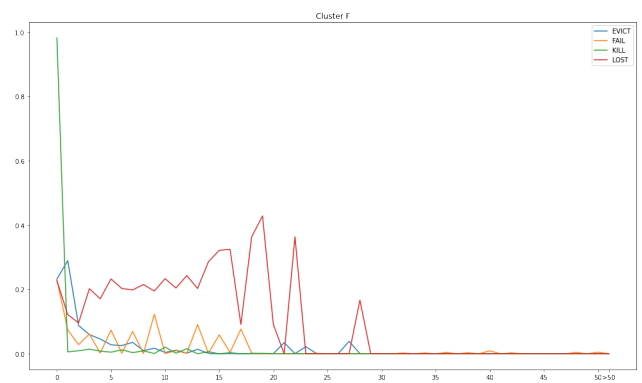

(f) Cluster F

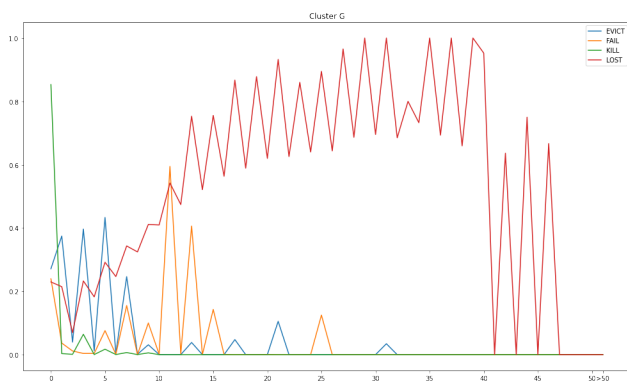

(g) Cluster G

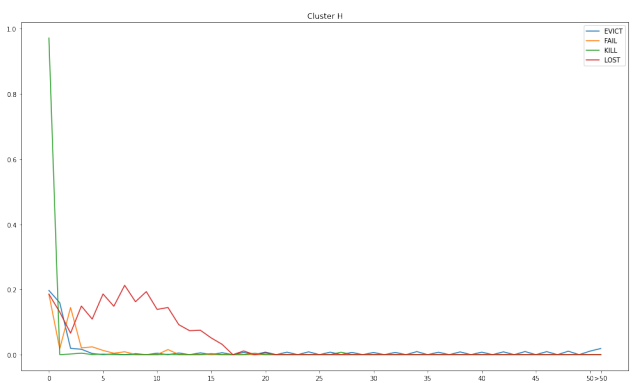

(h) Cluster H

Figure 16. Conditional probability of task success given a number of specific unsuccessful events observed, i.e. eviction, fail, kill or lost.