

# Information Modelling & Analysis – Project 2

Claudio Maggioni

## Code Repository

The code and result files, part of this submission, can be found at:

- Repository: <https://github.com/infoMA2023/project-02-bug-prediction-maggic1>
- Commit ID: **TBD**

## Data Pre-Processing

I use the sources of the CLOSURE repository that were already downloaded using the command:

```
defects4j checkout -p Closure -v 1f -w ./resources
```

and used the code in the following subfolder for the project:

```
./resources/defects4j-checkout-closure-1f/src/com/google/javascript/jscomp/
```

relative to the root folder of the repository. The resulting CSV of extracted, labelled feature vectors can be found in the repository at the path:

```
./metrics/feature_vectors_labeled.csv
```

relative to the root folder of the repository.

Unlabeled feature vectors can be computed by running the script `./extract_feature_vectors.py`. The resulting CSV of unlabeled feature vectors is located in `./metrics/feature_vectors.csv`.

Labels for feature vectors can be computed by running the script `./label_feature_vectors.py`.

## Feature Vector Extraction

I extracted **291** feature vectors in total. Aggregate metrics about the extracted feature vectors, i.e. the distribution of the values of each code metric, can be found in Table 1.

Table 1: Distribution of values for each extracted code metric.

Metric	Minimum	Average	Maximum
BCM	0	13.4124	221
CPX	0	5.8247	96
DCM	0	4.8652	176.2
EX	0	0.1134	2
FLD	0	6.5773	167
INT	0	0.6667	3
MTH	0	11.6529	209
NML	0	13.5622	28
RET	0	3.6735	86
RFC	0	107.2710	882
SZ	0	18.9966	347
WRD	0	314.4740	3133

## Feature Vector Labelling

After feature vectors are labeled, I determine that the dataset contains **75** buggy classes and **216** non-buggy classes.

## Classifiers

In this section I explain how I define and perform training for each classifier.

Since the dataset has an unbalanced number of feature vectors of each class, in order to increase classification performance I upsample the dataset by performing sampling with replacement over the least frequent class until the number of feature vectors matches the most frequent class<sup>1</sup>.

Other than for the **GaussianNB** (Naive Bayes) classifier, the classifiers chosen for the project offer to select hyperparameter values. In order to choose them, I perform a grid search over each classifier. The hyperparameter values I have considered in the grid search for each classifier are the following:

- For *DecisionTreeClassifier*:

Parameter	Values
criterion	gini, entropy
splitter	best, random

- For *SVC*:

Parameter	Values
kernel	linear, poly, rbf, sigmoid
gamma	scale, auto

- For *MLPClassifier*:

Parameter	Values
max_iter	500000
hidden_layer_sizes	[5, 10, 15, ..., 100], [15, 30, 45, 60, 75, 90] <sup>2</sup> , [20, 40, 60, 80, 100] <sup>3</sup>
activation	identity, logistic, tanh, relu
solver	lbfgs, sgd, adam
learning_rate	constant, invscaling, adaptive

Note that the [...]<sup>2</sup> denotes a cartesian product of the array with itself, and [...]<sup>3</sup> denotes the cartesian product of [...]<sup>2</sup> with the array (i.e. [...]<sup>3</sup> = [...]<sup>2</sup> × [...] = ([...] × [...]) × [...]).

Note also the high upper bound on iterations (500000). This is to allow convergence of the less optimal hyperparameter configurations and avoid **ConvergenceWarning** errors.

- For *RandomForestClassifier*:

Parameter	Values
criterion	gini, entropy
max_features	sqrt, log2
class_weight	balanced, balanced_subsample

<sup>1</sup>Upsampling due to unbalanced classes was suggested by *Michele Cattaneo*, who is attending this class.

The script `./train_classifiers.py`, according to the random seed 3735924759, performs upscaling of the dataset and the grid search training, by recording precision, accuracy, recall and the F1 score of each configuration of hyperparameters. These metrics are then collected and stored in `./models/models.csv`.

The metrics for each classifier and each hyperparameter configuration in decreasing order of accuracy are reported in the following sections.

For each classifier, I then choose the hyperparameter configuration with highest accuracy. Namely, these configurations are:

Classifier	Hyper-parameter configuration	Precision	Accuracy	Recall	F1 Score
DecisionTreeClassifier	criterion: gini, splitter: best	0.7885	0.8506	0.9535	0.8632
GaussianNB	—	0.8	0.6782	0.4651	0.5882
MLPClassifier	activation: logistic, hidden_layer_sizes: (60, 80, 100), learning_rate: constant, max_iter: 500000, solver: lbfgs	0.8958	0.9425	1	0.9451
RandomForestClassifier	class_weight: balanced, criterion: gini, max_features: sqrt	0.8367	0.8851	0.9535	0.8913
SVC	gamma: scale, kernel: rbf	0.7174	0.7356	0.7674	0.7416

## Decision Tree (DT)

criterion	splitter	precision	accuracy	recall	f1
gini	best	0.788462	0.850575	0.953488	0.863158
gini	random	0.784314	0.83908	0.930233	0.851064
entropy	random	0.736842	0.816092	0.976744	0.84
entropy	best	0.745455	0.816092	0.953488	0.836735

## Naive Bayes (NB)

precision	accuracy	recall	f1
0.8	0.678161	0.465116	0.588235

## Support Vector Machine (SVP)

gamma	kernel	precision	accuracy	recall	f1
scale	rbf	0.717391	0.735632	0.767442	0.741573
scale	linear	0.75	0.735632	0.697674	0.722892
auto	linear	0.75	0.735632	0.697674	0.722892
auto	rbf	0.702128	0.724138	0.767442	0.733333
scale	sigmoid	0.647059	0.678161	0.767442	0.702128
auto	sigmoid	0.647059	0.678161	0.767442	0.702128
auto	poly	0.772727	0.643678	0.395349	0.523077
scale	poly	0.833333	0.597701	0.232558	0.363636

## Multi-Layer Perceptron (MLP)

For sake of brevity, only the top 100 results by accuracy are shown.

activation	hidden_layer_sizes	learning_rate	max_iter	solver	precision	accuracy	recall	f1
logistic	(60, 80, 100)	constant	500000	lbfgs	0.895833	0.942529	1	0.945055
logistic	(40, 80, 100)	adaptive	500000	lbfgs	0.86	0.91954	1	0.924731
tanh	(40, 80, 100)	invscaling	500000	adam	0.86	0.91954	1	0.924731
tanh	(60, 100, 80)	adaptive	500000	lbfgs	0.86	0.91954	1	0.924731
tanh	(100, 60, 20)	constant	500000	adam	0.86	0.91954	1	0.924731
tanh	(100, 80, 80)	constant	500000	adam	0.86	0.91954	1	0.924731
relu	(75, 30)	adaptive	500000	lbfgs	0.86	0.91954	1	0.924731
logistic	(20, 40, 60)	adaptive	500000	lbfgs	0.875	0.91954	0.976744	0.923077
logistic	(40, 60, 80)	adaptive	500000	lbfgs	0.843137	0.908046	1	0.914894
logistic	(80, 40, 20)	constant	500000	lbfgs	0.843137	0.908046	1	0.914894
tanh	30	invscaling	500000	lbfgs	0.843137	0.908046	1	0.914894
tanh	60	constant	500000	lbfgs	0.843137	0.908046	1	0.914894
tanh	85	adaptive	500000	lbfgs	0.843137	0.908046	1	0.914894
tanh	(30, 30)	constant	500000	adam	0.843137	0.908046	1	0.914894
tanh	(45, 45)	adaptive	500000	lbfgs	0.843137	0.908046	1	0.914894
tanh	(60, 60)	invscaling	500000	lbfgs	0.843137	0.908046	1	0.914894
tanh	(75, 45)	invscaling	500000	lbfgs	0.843137	0.908046	1	0.914894
tanh	(75, 75)	adaptive	500000	lbfgs	0.843137	0.908046	1	0.914894
tanh	(90, 90)	invscaling	500000	adam	0.843137	0.908046	1	0.914894
tanh	(20, 40, 60)	invscaling	500000	adam	0.843137	0.908046	1	0.914894
tanh	(20, 100, 20)	invscaling	500000	lbfgs	0.843137	0.908046	1	0.914894
tanh	(40, 20, 100)	constant	500000	adam	0.843137	0.908046	1	0.914894
tanh	(40, 80, 60)	invscaling	500000	adam	0.843137	0.908046	1	0.914894
tanh	(40, 80, 100)	adaptive	500000	adam	0.843137	0.908046	1	0.914894
tanh	(60, 20, 40)	adaptive	500000	lbfgs	0.843137	0.908046	1	0.914894
tanh	(60, 60, 80)	constant	500000	adam	0.843137	0.908046	1	0.914894
tanh	(60, 80, 80)	adaptive	500000	lbfgs	0.843137	0.908046	1	0.914894
tanh	(80, 20, 40)	adaptive	500000	lbfgs	0.843137	0.908046	1	0.914894
tanh	(80, 40, 80)	constant	500000	adam	0.843137	0.908046	1	0.914894
tanh	(80, 60, 60)	constant	500000	lbfgs	0.843137	0.908046	1	0.914894
relu	(20, 20, 80)	constant	500000	adam	0.843137	0.908046	1	0.914894
relu	(20, 40, 100)	constant	500000	lbfgs	0.843137	0.908046	1	0.914894
relu	(20, 60, 20)	adaptive	500000	adam	0.843137	0.908046	1	0.914894
relu	(20, 60, 100)	adaptive	500000	adam	0.843137	0.908046	1	0.914894
relu	(20, 100, 20)	constant	500000	adam	0.843137	0.908046	1	0.914894
relu	(20, 100, 40)	adaptive	500000	adam	0.843137	0.908046	1	0.914894
relu	(40, 20, 80)	constant	500000	lbfgs	0.843137	0.908046	1	0.914894
relu	(40, 80, 60)	constant	500000	lbfgs	0.843137	0.908046	1	0.914894
relu	(60, 20, 100)	constant	500000	adam	0.843137	0.908046	1	0.914894
relu	(80, 20, 60)	constant	500000	lbfgs	0.843137	0.908046	1	0.914894
relu	(80, 60, 20)	adaptive	500000	adam	0.843137	0.908046	1	0.914894
relu	(100, 20, 60)	invscaling	500000	adam	0.843137	0.908046	1	0.914894
logistic	(20, 60, 80)	invscaling	500000	lbfgs	0.857143	0.908046	0.976744	0.913043
logistic	(60, 20, 20)	adaptive	500000	lbfgs	0.857143	0.908046	0.976744	0.913043
tanh	(15, 45)	constant	500000	lbfgs	0.857143	0.908046	0.976744	0.913043
tanh	(45, 90)	invscaling	500000	lbfgs	0.857143	0.908046	0.976744	0.913043
tanh	(90, 30)	constant	500000	lbfgs	0.857143	0.908046	0.976744	0.913043
tanh	(20, 80, 100)	invscaling	500000	adam	0.857143	0.908046	0.976744	0.913043
tanh	(20, 80, 100)	adaptive	500000	lbfgs	0.857143	0.908046	0.976744	0.913043
tanh	(40, 40, 40)	adaptive	500000	lbfgs	0.857143	0.908046	0.976744	0.913043
tanh	(40, 60, 100)	adaptive	500000	adam	0.857143	0.908046	0.976744	0.913043
tanh	(60, 80, 60)	constant	500000	lbfgs	0.857143	0.908046	0.976744	0.913043
tanh	(100, 40, 60)	invscaling	500000	lbfgs	0.857143	0.908046	0.976744	0.913043
tanh	(100, 80, 100)	adaptive	500000	adam	0.857143	0.908046	0.976744	0.913043
relu	(30, 30)	adaptive	500000	lbfgs	0.857143	0.908046	0.976744	0.913043

activation	hidden_layer_sizes	learning_rate	max_iter	solver	precision	accuracy	recall	f1
relu	(20, 20, 40)	adaptive	500000	lbfgs	0.857143	0.908046	0.976744	0.913043
relu	(20, 40, 40)	adaptive	500000	adam	0.857143	0.908046	0.976744	0.913043
relu	(40, 20, 100)	adaptive	500000	adam	0.857143	0.908046	0.976744	0.913043
relu	(60, 80, 20)	invscaling	500000	lbfgs	0.857143	0.908046	0.976744	0.913043
logistic	(40, 80, 60)	adaptive	500000	lbfgs	0.87234	0.908046	0.953488	0.911111
logistic	35	adaptive	500000	lbfgs	0.826923	0.896552	1	0.905263
logistic	(15, 60)	invscaling	500000	lbfgs	0.826923	0.896552	1	0.905263
logistic	(45, 45)	constant	500000	lbfgs	0.826923	0.896552	1	0.905263
logistic	(20, 20, 60)	adaptive	500000	lbfgs	0.826923	0.896552	1	0.905263
logistic	(60, 60, 80)	adaptive	500000	lbfgs	0.826923	0.896552	1	0.905263
logistic	(80, 40, 100)	invscaling	500000	lbfgs	0.826923	0.896552	1	0.905263
logistic	(100, 100, 100)	constant	500000	lbfgs	0.826923	0.896552	1	0.905263
tanh	60	constant	500000	adam	0.826923	0.896552	1	0.905263
tanh	(15, 15)	invscaling	500000	adam	0.826923	0.896552	1	0.905263
tanh	(15, 45)	adaptive	500000	adam	0.826923	0.896552	1	0.905263
tanh	(30, 30)	invscaling	500000	adam	0.826923	0.896552	1	0.905263
tanh	(30, 60)	constant	500000	adam	0.826923	0.896552	1	0.905263
tanh	(60, 90)	invscaling	500000	lbfgs	0.826923	0.896552	1	0.905263
tanh	(75, 15)	constant	500000	lbfgs	0.826923	0.896552	1	0.905263
tanh	(75, 45)	constant	500000	lbfgs	0.826923	0.896552	1	0.905263
tanh	(90, 15)	adaptive	500000	adam	0.826923	0.896552	1	0.905263
tanh	(90, 45)	invscaling	500000	lbfgs	0.826923	0.896552	1	0.905263
tanh	(20, 40, 20)	invscaling	500000	adam	0.826923	0.896552	1	0.905263
tanh	(20, 40, 40)	invscaling	500000	adam	0.826923	0.896552	1	0.905263
tanh	(20, 60, 20)	adaptive	500000	adam	0.826923	0.896552	1	0.905263
tanh	(20, 80, 60)	constant	500000	adam	0.826923	0.896552	1	0.905263
tanh	(20, 80, 80)	constant	500000	adam	0.826923	0.896552	1	0.905263
tanh	(20, 80, 100)	constant	500000	adam	0.826923	0.896552	1	0.905263
tanh	(40, 20, 60)	invscaling	500000	lbfgs	0.826923	0.896552	1	0.905263
tanh	(40, 60, 60)	constant	500000	adam	0.826923	0.896552	1	0.905263
tanh	(40, 60, 60)	invscaling	500000	adam	0.826923	0.896552	1	0.905263
tanh	(40, 80, 20)	adaptive	500000	adam	0.826923	0.896552	1	0.905263
tanh	(40, 100, 60)	constant	500000	adam	0.826923	0.896552	1	0.905263
tanh	(60, 40, 20)	constant	500000	adam	0.826923	0.896552	1	0.905263
tanh	(60, 40, 40)	invscaling	500000	adam	0.826923	0.896552	1	0.905263
tanh	(60, 40, 80)	constant	500000	lbfgs	0.826923	0.896552	1	0.905263
tanh	(60, 60, 20)	constant	500000	adam	0.826923	0.896552	1	0.905263
tanh	(60, 80, 60)	constant	500000	adam	0.826923	0.896552	1	0.905263
tanh	(60, 80, 80)	invscaling	500000	adam	0.826923	0.896552	1	0.905263
tanh	(60, 100, 20)	invscaling	500000	adam	0.826923	0.896552	1	0.905263
tanh	(60, 100, 40)	adaptive	500000	adam	0.826923	0.896552	1	0.905263
tanh	(60, 100, 60)	constant	500000	adam	0.826923	0.896552	1	0.905263
tanh	(60, 100, 60)	adaptive	500000	adam	0.826923	0.896552	1	0.905263
tanh	(60, 100, 80)	constant	500000	adam	0.826923	0.896552	1	0.905263
tanh	(80, 40, 40)	constant	500000	adam	0.826923	0.896552	1	0.905263

## Random Forest (RF)

criterion	class_weight	max_features	precision	accuracy	recall	f1
gini	balanced	sqrt	0.836735	0.885057	0.953488	0.891304
entropy	balanced	sqrt	0.807692	0.873563	0.976744	0.884211
gini	balanced_subsample	sqrt	0.807692	0.873563	0.976744	0.884211
entropy	balanced_subsample	sqrt	0.807692	0.873563	0.976744	0.884211

criterion	class_weight	max_features	precision	accuracy	recall	f1
gini	balanced	log2	0.82	0.873563	0.953488	0.88172
entropy	balanced	log2	0.82	0.873563	0.953488	0.88172
gini	balanced_subsample	log2	0.803922	0.862069	0.953488	0.87234
entropy	balanced_subsample	log2	0.803922	0.862069	0.953488	0.87234

## Evaluation

### Output Distributions

Add a boxplot showing mean and standard deviation for **Precision** values on all 6 classifiers (5 trained + 1 biased)

Add a boxplot showing mean and standard deviation for **Recall** values on all 6 classifiers (5 trained + 1 biased)

Add a boxplot showing mean and standard deviation for **F1** values on all 6 classifiers (5 trained + 1 biased)

### Comparison and Significance

For every combination of two classifiers and every performance metric (precision, recall, f1) compare which algorithm performs better, by how much, and report the corresponding p-value in the following subsubsections:

Table 12: Pairwise Wilcoxon test for precision for each combination of classifiers.

	DecisionTreeClassifier	GaussianNB	MLPClassifier	RandomForestClassifier	SVC
BiasedClassifier	0.0000	0.0000	0.0000	0.0000	0.0000
DecisionTreeClassifier	–	0.0893	0.4012	0.0000	0.0000
GaussianNB	–	–	0.0348	0.0000	0.0000
MLPClassifier	–	–	–	0.0000	0.0000
RandomForestClassifier	–	–	–	–	0.0000

Table 13: Pairwise Wilcoxon test for recall for each combination of classifiers.

	DecisionTreeClassifier	GaussianNB	MLPClassifier	RandomForestClassifier	SVC
BiasedClassifier	0.0000	0.0000	0.0000	0.0000	0.0000
DecisionTreeClassifier	–	0.0000	0.0118	0.3276	0.0000
GaussianNB	–	–	0.0000	0.0000	0.0000
MLPClassifier	–	–	–	0.0001	0.0000
RandomForestClassifier	–	–	–	–	0.0000

Table 14: Pairwise Wilcoxon test for the F1 score metric for each combination of classifiers.

	DecisionTreeClassifier	GaussianNB	MLPClassifier	RandomForestClassifier	SVC
BiasedClassifier	0.0000	0.0000	0.0000	0.0000	0.0000
DecisionTreeClassifier	–	0.0000	0.4711	0.0000	0.0000
GaussianNB	–	–	0.0000	0.0000	0.0000
MLPClassifier	–	–	–	0.0000	0.0000
RandomForestClassifier	–	–	–	–	0.0000

### F1 Values

- 
- ...

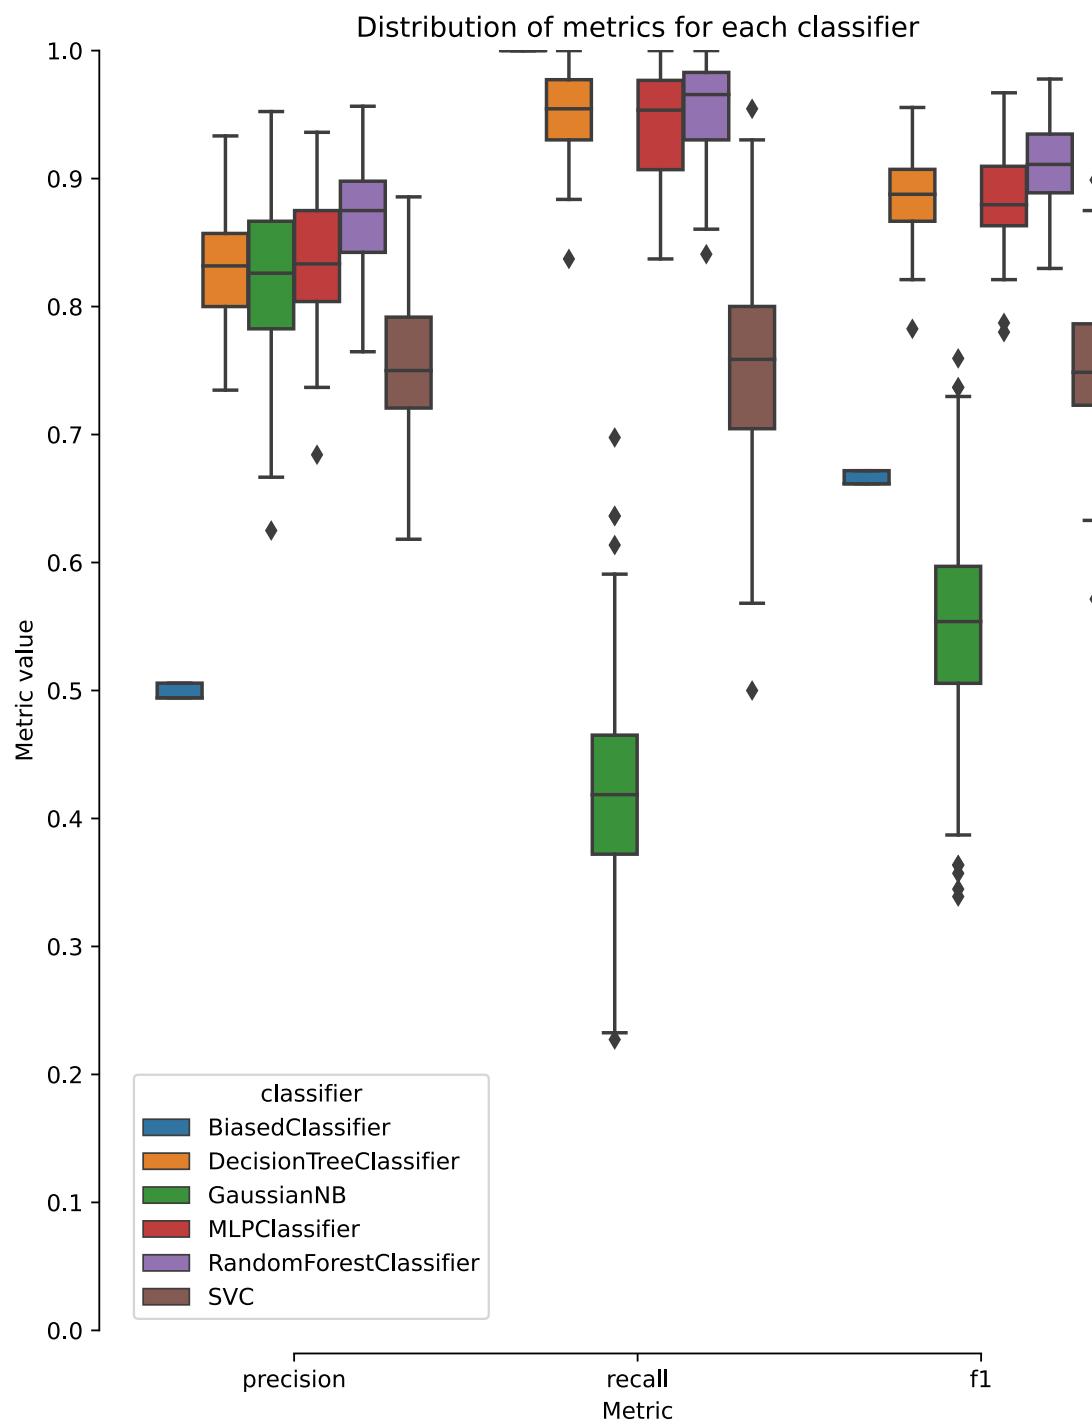


Figure 1: Precision, Recall and F1 score distribution for each classifier for 20-times cross validation.

**Precision**

(same as for F1 above)

**Recall**

(same as for F1 above)

**Practical Usefulness**

Discuss the practical usefulness of the obtained classifiers in a realistic bug prediction scenario (1 paragraph).